

MAGNUSON

SUPERCHARGERS

HeartBeat Installation Instructions for:
INTERCOOLED SUPERCHARGER SYSTEM
2010-2012 LS3/L99 Chevrolet Camaro



Step-by-step instructions for installing the best in supercharger systems.

*** PREMIUM GASOLINE FUEL REQUIRED ***

ATTENTION!

Your MAGNUSON SUPERCHARGER kit is sensitive to corrosion!

Use only the vehicle manufacturer recommended coolant for your engine in the intercooler system as well.

Magnuson Products LLC
1990 Knoll Drive, Bldg A, Ventura, CA. 93003
(805) 642-8833
magnusonsuperchargers.com



INSTALLATION MANUAL

Magnuson SuperCharger

GM 6.2L Engine

2010-2012 LS3/L99 Chevrolet Camaro

Please take a few moments to review this manual thoroughly before you begin work. Make a quick parts check to make certain your kit is complete (see shipper parts list in this package). If you discover shipping damage or shortage, please call our office immediately. Take a look at exactly what you are going to need in terms of tools, time, and experience. Review our limited warranty with care. When unpacking the supercharger kit DO NOT lift the supercharger assembly by the black plastic bypass actuator. This is pre-set from the factory and can be altered if used as a lifting point!

Caution: Relieve the fuel system pressure before servicing fuel system components in order to reduce the risk of fire and personal injury. After relieving the system pressure, a small amount of fuel may be released when servicing the fuel lines or connections. In order to reduce the risk of personal injury, cover the regulator and fuel line fittings with a shop towel before disconnecting. This will catch any fuel that may leak out. Place the towel in an approved container when the job is complete.

Use only premium gasoline fuel, 91 octane or better.

Magnuson SuperCharger systems are manufactured to produce about 20 RWHP per pound of boost at sea level. High altitudes will produce different numbers.

Our Magnuson SuperCharger kits are designed for engines in good mechanical condition only. Installation on high mileage or damaged engines is not recommended and may result in engine failure, for which we are not responsible. Magnuson Products is not responsible for the engine or consequential damages.

Magnuson Products supercharger kits are designed for use on stock vehicles. To that end, the alteration or modification of the fuel system, drive train, engine, and/or supercharger outside of stock parameters in any way can result in engine damage or failure for which Magnuson Products is NOT responsible and will void Magnuson Products warranty and CARB certification. Aftermarket engine modification devices that modify fuel and spark curve (including, but not limited to programmers) are not recommended and may cause engine damage or failure. Use of non-Magnuson Products approved programming will void all warranties. If you have any questions, call us.

A new GM fuel filter is recommended at the time of supercharger installation
Stock spark plugs and stock plug gap are recommended
Drive belt = Gates# K061045

Tools Required:

Metric wrench set
½" - 3/8" and ½" drive metric socket set with 22mm and 24 mm (Standard & Deep)
3/8" and ½" drive Foot pound and inch pound torque wrenches
Phillips and flat head screwdrivers
1/2" breaker bar
Fuel line quick disconnect tools (included in kit)
Small or angled 3/8" drill motor
Hammer, and small drift punch
Drain pan, and funnel
Hose cutters
Hose clamp pliers
Safety glasses
Small pry bar
Metric Allen socket set 3/8" drive
Shop vacuum cleaner

Contact information:
Magnuson Products LLC
1990 Knoll Drive, Bldg A
Ventura, CA 93003
Sales/Tech support: 805-642-8833
Websites:
www.magnusonsuperchargers.com
Email:
sales@magnusonproducts.com

Helpful Tool: Air or electric impact wrench. Torque Angle Meter

Table of Contents

Section 1: Tuning Your Vehicle Computer, and Initial Steps	4
Section 2: Intake Plenum, PCV, EVAP, and Fuel Line Removal	7
Section 3: Coil Pack, and Manifold Removal	11
Section 4: Coolant Line, and Air Box Removal	15
Section 5: Crank Pulley Pinning	18
Section 6: Idler Pulley Replacement	21
Section 7: Steam Pipe, and Coil Pack Replacement.	23
Section 8: EVAP Solenoid, and Manifold Parts Removal	28
Section 9: Fuel Rail Preparation, and Supercharger Install.	32
Section 10: Belt, Radiator, and Throttle Body Installation	45
Section 11: Hose Line, and Electrical Connections	47
Section 12: Front Fascia Removal, and Intercooler Pump Installation	54
Section 13: Low Temperature Radiator (LTR) Installation	60
Section 14: Body Panel Installation, and Final Inspection	67
Appendix	70

NOTE: This instruction manual follows the process we used to complete this installation on our test vehicle. This does not imply there aren't alternate approaches.

*** PLEASE PAY ATTENTION TO THE STEPS IN THIS INSTRUCTION MANUAL. ENGINE DAMAGE CAN OCCUR IF YOU DO NOT FOLLOW THE INSTRUCTIONS. ***

NOTE: For the purpose of these instructions all references to left or right side are assumed to be as indicated from a seated position in the driver's seat of the vehicle.

Section 1: Tuning Your Vehicle Computer, and Initial Steps

1. The first step is to setup your vehicle ECM/TCM control modules. Follow the instructions in your SCT tuner manual to update your Camaro to function with the Magnuson Supercharger system.



2. Your Intercooler system is sensitive to corrosion. It's very important to use the OEM recommended coolant mixture in your supercharger system as well.



3. Your system requires the use of minimum 91 Octane gasoline fuel. This system is not compatible with E85 fuel.



4. Open the trunk and lift up the floor mat. Unscrew the cap nut holding the floor panel in place and set the panel aside for later reinstall.



5. Remove the protective cover underneath the floor panel.



6. Your battery is now exposed. Disconnect the battery negative terminal using a 10 mm wrench. Cap or cover the terminal to protect against accidental contact with the battery post.




Make sure your vehicle has cooled down before proceeding.

7. Remove the radiator fill cap.



8. From below the vehicle on the left hand side, loosen the petcock drain to allow the radiator to release the coolant. Collect in a clean pan for refilling later on. Set aside in a safe place where it won't be contaminated. When draining is complete, tighten the petcock valve and replace the radiator cap.



9. Use a 13mm wrench to remove the strut tower brace, if equipped, at the suspension towers. There are two bolts on each side. Set the strut tower brace aside.



10. Disconnect the PCV tube at the oil separator if equipped.



11. Remove the oil fill cap, or the oil separator if equipped.



Section 2: Intake Plenum, PCV, EVAP, and Fuel Line Removal

12. Lift up on the front edge of the engine cover to disconnect the cover from the mounting posts.



13. Replace the oil fill cap. If vehicle was equipped with oil-separator, cap or cover the fill neck. The separator will be installed in a later step.



14. Remove vacuum line release tab shown with a screwdriver, and disconnect the line.



15. Use an 8mm nut driver or flat head screwdriver to loosen the clamps holding the bellows to the air box, and the air supply plenum to the throttle body. Pull these connections free.




16. Lift up and pull the air supply plenum out of the engine compartment. Set aside.



17. Disconnect the EVAP tube looping over the throttle body from the right hand side of the engine to the rear of the left hand side of the throttle body.




18. Disconnect the other end of the tube at the EVAP Solenoid by pressing the white release tabs and pulling free.



19. Disconnect the electrical plug on the EVAP Solenoid.




20. Disconnect the remaining tube from the EVAP Solenoid.



21. Use a 10 mm wrench to remove the nut holding the plastic bracket over the intake manifold at the back of the engine, and remove the bracket.




22. Use the supplied fuel line removal tool to disconnect the EVAP connection next to the fuel line on the right hand side of the engine behind the heat shield. First, push the connection onto the hard line barb a bit, then press the fuel line removal tool into the fitting to release the retaining ring. Now pull the EVAP line off of the hard line barb.



23. Remove the fuel tank cap to relieve residual pressure on the fuel system.



24. Pry out on the safety clip to release the clip from the fuel line/hard line.



25. Press the fitting onto the hard line barb, then press the provided fuel line removal tool into the connection to release the retaining ring.

Place a rag around the fuel line connection prior to removal. Have a cup on hand to catch any leaking fuel. The rag, and cup have been left out of this photo for better view of the connections.



26. Now the fuel line can be pulled free of the hard line barb. Place a cap over the fuel line, or improvise one with a section of fuel compatible hose and a plug. Dispose of fuel soaked shop towels in an appropriate manner.




27. Replace the fuel fill cap.



Section 3: Coil Pack, and Manifold Removal

28. Disconnect the MAP Sensor connection behind the throttle body on the right hand side of the engine.



29. Disconnect the throttle control harness from the throttle body.




30. There is a short PCV tube running from below the intake manifold to a hose barb just below the MAP sensor. Disconnect this fitting.




31. Pull the green locking clip from the coil pack main harness connector on each side of the engine.



32. Press the release tab and pull the harness connector from the coil pack mounted connection.



33. Pull the right side harness mounting clips from the coil pack mounting posts on the coil pack bracket.



34. Disconnect the plug wires from the coil packs on both sides of the engine.



35. Remove the eight coil pack wires.



36. Use a 10mm wrench to remove the harness mounting posts/coil pack mounting bracket screws holding the brackets to the valve cover on each side of the engine. There will be five screws per bracket.



37. Remove the coil packs from the engine for modification and later re-installation.




38. Disconnect the injector plugs from the injectors on both sides of the engine. First pull out on the green locking tab then press the sides of the clip to release them from the injectors.



39. Use a pry tool to remove the injector harness mounting "trees" from the holes on the injector manifold mounting tabs.




40. At the back of the engine on the left hand side there may be a Vacuum Actuated Exhaust tube which reverses direction with a 90° fitting just after a 90° bend. Press the green locking tabs to release the tube from that connection if equipped.




41. Pull the brake booster connection from the brake booster grommet at the back of the engine compartment on the left hand side.



42. Use a 10 mm socket to remove the ten bolts holding the intake manifold to the heads.



43. Have an assistant help you to carefully lift the OEM intake manifold from the engine. Set aside for parts removal to incorporate with your new supercharger installation.



44. First use a shop vacuum to remove any loose contaminants from around your heads, intake ports and valley cover area.



45. Now use a shop towel with denatured alcohol, or some other non-petroleum based solvent to clean around all the intake openings.



46. Use tape or shop towels to cover the intake ports.

It's VERY important to not contaminate your work environment or allow any debris to fall into the exposed ports, engine damage CAN occur.



Section 4: Coolant Line, and Air Box Removal

47. Earlier you removed one end of a short looping tube from the intake manifold on the right hand side of the engine. The other end of this tube is now exposed. Release the locking tab and pull this tube off the valley cover hose barb. Retain tube for re-installation later.



48. Place a rag down as shown to catch any coolant. Disconnect the hose from the coolant vent pipe on the left hand side, front of the engine. Disconnect the other end of the coolant vent pipe hose from the barb on the left hand side of the radiator fill cap.

Note: Avoid spilling any coolant on the belts and pulleys. The smallest amount of coolant can cause the new belt to be noisy.



49. Pull up on the harness mounting rings that hold the harness to the water pump hose on the left side of the engine if equipped.



50. Disconnect the MAF sensor harness connection from the MAF Sensor on the OEM air box.



51. Remove the two nuts holding the air box with a 10 mm socket.



52. Remove the air box.



53. To minimize fluid mess, place shop towels below the water pump hose barb, remove the mounting clamp and pull the upper radiator hose from the water pump hose barb.

It's VERY IMPORTANT to not get coolant on your engine pulleys. The smallest amount can cause "Belt squeaking".



54. Also place towels below the radiator end of the upper radiator hose, remove the clamp and pull the radiator hose off the left hand side, upper radiator hose barb. If your car has an oil cooler hose attached with a "T" fitting then remove that hose at the lower connection shown with a green arrow.



55. Disconnect the radiator fan control plug from the receptacle on the right hand side of the radiator.



56. Use a 13 mm wrench to remove the radiator fan mounting screws from the radiator mounting tabs.



57. The radiator fan shroud should now be able to move somewhat freely. Remove the radiator fan shroud from the vehicle for later re-installation. You should be able to lift upwards on the shroud to remove from the engine bay.



Section 5: Crank Pulley Pinning

58. Use a 24 mm socket and impact wrench to remove the main crank pulley mounting bolt. You may need to apply some heat to the bolt to aid in removal.



59. This is the pin drill guide and provided mounting bolt. The stepped side faces towards the crank to center with the pulley.



60. Replace the removed crank pulley mounting bolt with the provided drill guide and mounting bolt. It's easier if you have the holes of the drill guide oriented horizontally for visibility purposes. Torque this down to 24 ft-lbs.



61. Place a strip of visible tape around the top of the last step of the provided step-drill for visibility purposes. Use a drill motor to drill out the crank and pulley completely to the second step of the provided step drill for both holes. You can easily see when you have gone far enough when the visible tape touches the face of the key way guide.



62. Use compressed air to evacuate the particles from the new holes.




63. Vacuum out area to clear metal chips.



64. Install the reamer bit in your drill motor and ream out your holes. Once again use compressed air to remove debris from the two holes. Now remove the drill key way guide and mounting bolt using a 22mm socket.



65. Place two provided pins into the holes. Use a drift pin, or nail set to ensure that the two pins get completely into the holes.



66. This picture shows that the pins are behind the surface where the pulley bolt will touch.

Make sure the pins are below the contact surface for the harmonic balancer bolt.




67. Install the new provided factory GM harmonic balancer bolt. Using a 24 mm socket, tighten the new harmonic balancer bolt according to the GM specifications.

- a. Tighten to 50 N-m (37 ft-lbs) using a torque wrench. Verify your torque wrench setting.
- b. Tighten an additional 140° using a torque angle meter.



Section 6: Idler Pulley Replacement

68. Use a 15mm socket to spring the tensioner to allow the outer accessory drive belt to be removed.



69. Use a 15 mm socket to remove the two tensioner mounting bolts.




70. Remove the OEM tensioner assembly from the vehicle and set aside along with the fasteners from the previous step. The tensioner, and bolts will be reused.




71. Below and between the tensioner mounting bosses use a 10 mm socket to remove the indicated bolt. This will not be reused.



72. We will be using this vacated hole to mount the new tensioner assembly.



73. Use a 15 mm wrench to mount the new tensioner/idler pulley mounting bracket in the holes vacated using the two OEM bolts removed earlier. Use a 12 mm socket to secure the provided bolt below and between the removed tensioner mounting bolts.




74. Torque the two 15 mm hex mounting bolts to 30 ft-lbs, and the 12 mm hex mounting bolt to 18 ft-lbs.




75. Re-mount the OEM tensioner to the new tensioner mounting bracket torquing the two provided bolts to 30 ft-lbs with a 15 mm socket.



76. Mount the provided Idler pulley with the side showing in the photo facing out using the provided bolt to the boss between the crank pulley and the tensioner pulley.



77. This photo shows the location for the provided idler pulley shown in the last step. Torque the mounting bolt for the provided idler pulley to 30 ft-lbs.



Section 7: Steam Pipe, and Coil Pack Replacement.

78. Use a 10 mm socket to remove the two bolts holding the OEM steam pipe to the heads.




79. Remove the OEM steam pipe, this will not be reused. Remove the old O-rings from the cylinder heads if they did not come off with the steam pipe. Retain a 1" section of the protective slit hose for a later step.



NOTE: Make sure there is a new O-ring installed on the bottom side of each block of the provided steam pipe before installing!

80. Mount the provided steam pipe to the vacated bosses on each head, secure in position with the OEM mounting bolts and torque to 108 in-lbs. Verify your torque wrench settings.



81. This image shows the OEM coil pack and the new provided coil pack mounting bracket with nuts and spacers.



82. Start by disconnecting each harness wire from the coils on both OEM coil pack assemblies.



83. Use a 10 mm socket to remove the mounting bolts holding the coils to the OEM mounting brackets.



84. This is a separated coil pack set, mounting bolts, and remaining bracket.



85. Use a flathead screwdriver to release the tab holding the harness female plug terminal to the mounting brackets.



86. Pull the plug terminals away from the brackets.



87. This shows the plastic cover over the wiring harness attached to the coil pack mounting brackets.




88. Use a small flathead screwdriver to release the tabs locking these covers over the harnesses on the mounting brackets.



89. Remove the covers completely from the wiring harnesses, and separate harnesses from the mounting brackets.



90. Orient the OEM wiring harnesses with the plugs at the top, lay the bracket down over the wiring harness tongue that goes to the main female plug. The studs should be pointing up as shown in this picture.



91. Slide the metal mounting tab on the back of the plug into the slot on the new coil pack mounting brackets completely as shown. The "Teeth" of the metal tab will lock the plug in position. You can place a block, shown with an arrow, under the plug face and press the brackets down onto the plug as shown in this picture.




Make sure the "teeth" of the metal mounting tab bite into the bracket, locking it in place.

92. Place a provided spacer on each of the studs on the new coil pack mounting brackets.



93. Use a 10mm nut driver or wrench to secure the OEM coils to the new coil pack mounting brackets with the provided nuts. The harness female plug should be oriented to the flat "top" of the mounting brackets, the receptacle for the plug wires will be pointed in the "down" direction, same as the "tongues" of the new mounting brackets. Torque the nuts to 108 in-lb. Verify your torque wrench settings.



94. Connect the plugs to each of the coils on the mounting brackets.



95. This shows the completed assembly with the OEM parts that will not be reused above. We suggest that you keep your OEM parts separate in case you want to return your vehicle to "stock" and mount the supercharger system on your next Camaro.



Section 8: EVAP Solenoid, and Manifold Parts Removal

96. Use a small screwdriver to spring the release tab on the EVAP Solenoid mounting bracket. Remove the EVAP Solenoid from the vehicle and set aside for reinstallation later.




97. Use a 15 mm wrench to remove the EVAP Solenoid mounting bracket from the right hand side, front of the head. The bracket and fastener will not be reused.



98. Connect the provided throttle position control extension harness to the OEM throttle control put on the right hand side of the engine just behind the tensioner pulley.




99. Route the harness behind the water pump, under the steam vent pipe and over to the left hand side of the engine. Secure to the existing harnesses using the provided zip ties.



100. Use a pry tool hook to remove the injector harness mounting tie "trees". These will not be reused. You can also cut them off, just be careful to not damage the harness.



101. Use a pair of diagonal pliers to cut the existing stand-off mounting tabs from the coil pack harness as shown.



102. Remove the two heater hose clamps at the water pump. These will be re-used.




103. Remove the two heater hose clamps near the firewall. These will be re-used. Remove the two heater hoses.



104. Here are the four OEM heater hose clamps. There are two small, and two large clamps.



105. Install the provided heater hose with the smaller 5/8" hose end on the rear water pump fitting, and connect the opposite end of this same hose to the larger hose fitting at the firewall. This hose attachment is shown in the left photo. Install the other heater hose to the remaining fittings as shown in the right photo. Use the OEM clamps just removed to secure these new heater hoses.



106. Use a 10 mm socket or nut driver to remove the four throttle body mounting bolts from the OEM intake manifold. Remove the throttle body, and bolts, and set aside for later install.



107. Remove the Schrader valve cap from the OEM fuel rail.



108. Use a small flathead screwdriver to release the injector locking clips from the injectors on the OEM fuel rail.



109. Remove the clamp securing the brake booster. Remove the fitting and the hose clamp and set aside for later use.



110. Connect the OEM brake booster valve to the end of the supplied hose that is closest to the mesh sleeve, securing in place with the OEM spring clamp.



111. If equipped, pull the vacuum hose from the back of the OEM intake manifold next to the vacuum hose that went to the brake booster.



112. This is the line removed from the OEM intake manifold. Save it for later use.



Section 9: Fuel Rail Preparation, and Supercharger Install.

113. Place a small bead of Lubriplate lubricant on the injector port openings of the supercharger system.



114. This shows the provided fuel rail and new injectors with the OEM injector mounting clips and Schrader valve cap.



115. Place the Schrader valve cap on the pressure release valve of the new fuel rail.



116. Place a small bead of Lubriplate lubricant in the cups of the fuel rail.




117. Install the new high flow injectors in the cups of the fuel rail. Orient the injectors with the plug receptacles pointing out.



118. Press the injector mounting clips onto the injectors securing them to the provided fuel rail.



119. This picture shows the provided EVAP breakout harness wire and new EVAP hose extension.




120. Press the EVAP hose extension onto the EVAP hard line on the right hand side of the engine, behind the heat shield adjacent to the fuel line.

You should feel/hear the locking ring engage, this should not be able to be removed without using the fuel line removal tool. Check your connection.



121. Connect the EVAP breakout harness wire onto the plug on the injector harness on the right hand side of the engine adjacent to the oil fill spout. Route the single yellow wire connection off toward the right fender. It will be secured in a later step.



122. Route this EVAP breakout harness wire back to the fire wall, over to the left hand side of the engine. Secure to the existing harnesses using the provided Zip-ties. Secure hose/harness to a heater hose at one point to prevent the hose from sagging.



123. Temporarily place a small section of your old split hose over the cross-over steam pipe just below the PCV hose barb coming out of the valley cover at the front right hand side of the engine.



124. Use a drift pin, or medium Phillips head screwdriver as a lever. Push the end into the PCV hose barb, and carefully lever the bar down until your "tool" just touches the split hose protecting your steam pipe. This should give you a bit more than $\frac{1}{4}$ " clearance were the tube to actually extend beyond the steam pipe.



125. Remove the section of split hose from the steam pipe. Ensure that the OEM fitting will still go on the "adjusted" barb. The OEM fitting should just barely clear the cross-over. The "U" shaped short tube connection removed earlier is going to be reused here. If it doesn't clear the cross-over pipe, adjust as necessary.



126. This is your supercharger assembly. It's a good idea to place a cap or tape over the supercharger inlet to protect from debris. Remove the bolts holding the supercharger lid (cover) to the housing and pull the lid (holding the intercooler assembly) off the housing. Place the lid aside for re-install shortly. Ensure that the lid is in a clean location and preferably covered to prevent any contamination by debris.



NOTE: Take note of what length fastener is used in each location.

127. Flip the supercharger housing upside down on a clean surface. It's a good idea to protect the surface from scratching or dings, we suggest using clean shop towels or cardboard as a buffer. Install the provided gasket plates over the supercharger intake manifold ports. They should snap into position and stay without falling out.



128. Remove the tape or shop towels covering the intake ports on your heads, and clean using alcohol or some other non-petroleum based solvent using a clean shop towel.



129. It's helpful to spray the heads, or gaskets with a mist of silicone spray, or mild soapy water to aid in this step. With the help of an assistant, carefully guide the supercharger housing assembly onto the heads, aligning the ports and mounting bolt holes.



130. Carefully slide the assembly around to achieve alignment. There should not be any "rocking" or "tipping" when the supercharger is completely contacting both heads evenly. Connect the short "U" tube PCV hose to the modified barb on the valley cover, and the adjacent hose barb on the supercharger assembly. Make sure the PCV tube does not interfere with the supercharger assembly.



131. Place a small bead of supplied blue Loctite 242 on the ten supplied M6 x 40mm supercharger mounting bolts.



132. Very carefully insert the provided M6 x 40mm supercharger mounting bolts through the holes in the outer ring of the supercharger. It's a good idea to use a magnet tool to avoid the bolts dropping into the exposed ports.

NOTE: Make sure your tape has been removed from the intake ports.




133. Before torqueing, first snug (hand tighten) all fasteners using the tightening pattern shown in the next step. Torque the mounting bolts down following the pattern shown in the next step to 108 in-lbs.

NOTE: Do not immediately torque each bolt to full specs, do this in steps!




134. This picture shows you the torque sequence.

There is a larger version of this diagram at the back of this installation manual.



NOTE: If your vehicle is equipped with an oil separator, skip the next two steps.


135. Connect the provided PCV hose to the hose barb on the right hand side, front of the valve cover. Secure in position with one of the provided dark-gray spring clamps in the area shown with a yellow arrow. Place a swivel clamp to connect the hose to the harness shown with a blue arrow.



136. The hose from the last step will be routed to the right for now. The opposite end will be attached to the air inlet later in the installation.



137. Connect the MAP sensor connector to the MAP sensor on the right hand side of the supercharger assembly just behind the bypass valve.



138. Ensure that the gasket on top of the supercharger assembly is properly seated, place a small film of Lubriplate lubricant on the gasket and while you're doing this, feel for inconsistencies! Your fingers are more sensitive than your eyes.



139. Verify that your supercharger lid is clean and relocate the lid on top of the supercharger assembly.


NOTE: There are alignment pins in the front left hand corner, and rear right hand corner.



140. These are the supercharger lid mounting bolts, note the four sizes and locate appropriately according to the diagram at the back of this book. Place a small bead of blue Loctite 242 on each of the mounting fasteners. Some of the fasteners will be located in a separate bag with the other sub-assemblies.



141. Start each of the fasteners by hand and finger tighten in a crisscross, center-out pattern. Use the tightening sequence shown two steps later.




142. Torque the fasteners down to 108 in-lbs in steps using the sequence shown in the next step.

NOTE: DO NOT immediately torque each bolt to full specs, do the torquing in steps!



143. This image shows the torquing sequence.
Fastener Length
20 mm: 9, 10, 11, 12, 13, 14 (9-14)
25 mm: 15, 16
50 mm: 1, 2, 3, 4, 5, 6, 7 (1-7)
60 mm: 8



There is a larger version of this diagram at the back of this book.

144. Install the fuel rail starting with getting the right hand side in position then rotating the left hand side down over the supercharger inlet.



145. Align the left hand side injectors with the mounting ports and press the injectors carefully into each port.



146. The fuel rail manifold mounting bracket holes should align with the mounting holes in the supercharger lid as shown.



147. When both sides of the injectors are in place, start installing the mounting bolts. Finger tighten all mounting bolts, including the one on the crossover pipe above the supercharger inlet.

NOTE: The back, left hand side mount will incorporate the provided EVAP Solenoid mounting bracket above the fuel rail mounting flange.



148. Torque the mounting bolts down to 108 in-lbs using a 10 mm socket.



149. Connect the injector plugs to the adjacent injectors ensuring that they snap into place. Engage the locking clips.



150. On the right hand side of the engine, tuck the wiring harness below the mounted fuel rail.



151. Place a bead of Blue Loctite 242 on the new coil pack mounting bolts shown here.



152. Install the new coil pack bracket assemblies on the valve covers and torque the mounting fasteners down to 108 in-lbs with a 10 mm socket.



153. Connect the harness coil pack plug to the coil pack bracket connectors on both sides of the engine.



154. Engage the locking clips securing the coil pack connectors in position.



155. Reconnect the plugs to the coils on both sides of the engine. Ensure you get the wires and jackets completely in position.



156. Connect the EVAP tube you routed behind the engine earlier to the OEM EVAP solenoid rear barb. Connect the EVAP breakout harness wire electrical connection you also routed behind the supercharger to the EVAP solenoid.




157. Mount the EVAP solenoid to the clip on the back left hand side of the fuel rail bracket installed earlier when the fuel rail was mounted to the supercharger assembly. The EVAP solenoid should clip into place just like the OEM bracket.



158. This stud on the coil pack mounting bracket is being used to anchor the wire harness shown in the next step. We will re-use the OEM fastener in this location on the right side of the engine.



159. This is the stud mounting clip with the OEM tie removed.



160. Slide a provided zip tie through the top hole of the stud mounting clip as shown.



161. Align the assembled mounting clip/zip tie on the wire harness, with the mounting stud and pull the zip tie tight anchoring it to the wire harness.



162. Press the mounting clip onto the stud securing the harness in position.



163. Install acorn nut on left rear coil to protect hoses from getting cut.



Section 10: Belt, Radiator, and Throttle Body Installation

164. Use a 15 mm wrench to rotate the tensioner and install the accessory drive belt as shown.

Use the belt diagram given at the back of this installation manual.



165. Verify that the radiator drain petcock on the left hand side, bottom of the radiator is closed and everything is clear behind the radiator.



166. Slide the fan shroud back down behind the radiator carefully, ensure that the clips at the bottom of the shroud have engaged with the mount locations on the radiator.



167. Secure the fan shroud to the radiator mount using the OEM mounting hardware.



168. Re-connect the wiring harness to the radiator shroud mounted connector.




169. Re-connect the OEM radiator hose to the water pump hose barb using the OEM spring clamp. Reconnect the free end of the hose back to the upper radiator hose barb on the left hand side of the radiator using the OEM spring clamp. Also connect the oil cooler hose if equipped.



170. Re-connect the wiring harness mounting clips to the just re-connected radiator hose.




171. Connect the provided 3 inch long coolant hose to the cross-over steam vent connector on the left hand side of the heads, below the supercharger housing inlet. Use the provided black spring clamp to make this connection shown with a yellow arrow. Install the provided plastic hose mender, shown with a blue arrow, to connect the 3 inch hose to the OEM hose. Secure in place with one of the provided black spring clamps. Attach the OEM vent hose to the opposite end of the hose mender using the OEM clamp.



172. Connect the opposite side of the OEM vent hose to the radiator in the location shown with the blue arrow using the OEM spring clamp. Route the hose over to the water pump hose connection and secure to the hose using a provided zip tie connector in the location shown with the yellow arrow.

DO NOT over tighten the zip tie, it's there to guide the hose not collapse it.



173. Make sure the throttle body O-ring is installed and fully seated. If you installed a cap or tape on the inlet remove it now.



Section 11: Hose Line, and Electrical Connections

174. If equipped with an exhaust actuator you will have the OEM hose shown here that you removed in Section 8. Remove and discard the section to the right of the connector shown with the arrow. It will be replaced with the provided 1/4" diameter 21" length hose. If your vehicle does not have this feature you can skip ahead to step #179.



175. Route the provided 1/4" diameter 21" length hose back below the injector connectors on the left hand side of the engine, between the valve cover and supercharger housing casting.



176. Pull the 1/4" diameter 21" length hose out behind the EVAP solenoid and out toward the left hand side fender to gain access as shown.



177. Connect the OEM hose shown at the beginning of this section to the hose installed in the last step.



178. Connect this connector to the hard line with the green locking tab by the firewall adjacent to the brake booster on the left hand side of the engine.



179. Pull the 1/4" diameter 21" length hose toward the front of the supercharger taking up the slack, and connect the free end to the vacuum hose barb at the center of the supercharger inlet where shown with the arrow.



180. Connect the provided vacuum hose between the EVAP solenoid and the hose barb at the top of the supercharger inlet on the left hand side of the engine. Make sure the connections have "clicked" and are locked in place.



181. Gather the brake booster hose that was built in an earlier step for reinstallation.



182. Plug the brake booster valve back into the brake booster grommet. Route the free end of the hose under the A/C hard lines, above the coil packs and forward on the left hand side of the engine. Connect the free end of the hose to the remaining hose barb on the left hand side of the supercharger inlet.




183. Use the provided hose clip to anchor the EVAP solenoid hose to the brake booster hose.




184. Connect the right angle connector of the provided fuel line to the back of the right hand side fuel rail connector. Pull on this connection, you should NOT be able to disconnect this hose without using a fuel line removal tool. Re-install the OEM fuel line locking clip.




185. Connect the remaining end of the provided fuel line connector to the fuel line connection behind the heat shield on the right hand side of the engine compartment, just forward of the EVAP hose connected earlier. Again, pull on the connection, it should not be able to be removed without a fuel line removal tool. When verified, reinstall the fuel line locking clip. Use the provided zip-ties to tie the fuel line and the EVAP line together making sure they are only holding the lines together, not compressing.



186. Route the provided IAT sensor connector/harness below the inlet.



187. Route the harness below the vent pipe hose and toward the IAT sensor.




188. Attach the connector to the IAT sensor. Tuck the harness back behind the coil pack bracket and anchor to existing harness using provided Zip-ties.



189. Anchor the harness to the existing hoses/harness at the water pump inlet hose barb. Continue to anchor to the harness along the radiator hose until you reach the air box.

DO NOT over tighten the zip ties.



190. Re-mount the air box.



191. Install the OEM throttle body to the supercharger inlet using the OEM fasteners, and torque these bolts to 108 in-lbs.



192. Attach the throttle extension harness plug to the throttle connector




193. Connect the MAF plug from the IAT breakout harness that you anchored to the radiator hose to the sensor on the air box throat. Connect the breakout harness plug to the OEM harness MAF plug connector.



194. Connect the provided inlet air tube. Secure in place with the provided worm gear hose clamps using an 8mm nut driver or flat head screwdriver.




195. If your vehicle is equipped with an oil separator, install the provided connector in the end of the hose closest to the fiber wrap as shown. If your vehicle is not equipped with an oil separator you already installed this hose in an earlier step to the PCV hose barb near the front of the right hand side valve cover, between the valve cover and supercharger intake manifold. In both cases, on the opposite end, install the 90° hose mender provided.



196. If your vehicle is equipped with the oil separator, connect the just installed connector to the barb on the oil separator neck.



197. Anchor the hose from the last step to the existing harness near the fuse center using the provided tube mounting clamp or cable ties. Do NOT over tighten cable ties, they are to restrict movement, not compress tubes.



198. If your vehicle does not have an oil separator, you already connected to the existing PCV hose barb near the front of the right hand side valve cover, between the valve cover and supercharger intake manifold. This barb is capped on an Oil Separator provided installation.




199. Route the other end of this hose outside the oil separator/oil fill spout over to the intake air tube and press the 90° fitting into the hole on the intake air tube.



Section 12: Front Fascia Removal, and Intercooler Pump Installation


200. Pry up on the locking tab of the six push pin rivets on the top of the fascia grill using a flat head screwdriver or pry tool.




201. When the locking tab of the push pin rivet is up, the bottom spreader can be pried up using again, a flat blade screwdriver or pry tool.



202. This shows the six upper push pin rivet locations. There may be shims installed between the bumper fascia and frame under these six points. Be careful later when removing bumper.



203. Use a 10 mm wrench to remove the two bolts connecting the fascia/grille to the sub frame at the bottom of the vehicle.




204. Disconnect the three bolts holding the plastic wheel well to the underside of the fascia with a 7 mm socket.



205. Several steps will be more accessible with the front wheels removed. Follow the instructions in your owner's manual for vehicle lifting, and wheel removal.



206. Use a T20 Torx screwdriver to remove the fasteners holding the wheel well to the perimeter of the fascia/grille, and fender.




207. The wheel well liners need to be removed completely to facilitate fascia/grill removal. Pry out the push pin rivets that secure the wheel wells to the sub-frame. Remove the T20 Torx fasteners at the perimeter and remove the plastic wheel wells from the vehicle. Set aside for later re-install.



208. Wheel well liner shown being removed.



209. Remove the now exposed fascia/grille mounting bolts holding the assembly to the vehicle. There are three that need to be removed with a 10mm socket and one with a 7mm socket.



210. Disconnect the harness connection for the lights at the right hand side forward at the grille.




211. Remove the two (one each side) remaining bolts holding the fascia/grille to the vehicle at the top corners, verify everything is disconnected and carefully remove the fascia/grille from the vehicle. The fascia/grille should simply pull away.




212. Remove the six bolts holding the bumper impact bar in place.



213. Front bumper shown removed. Remove the plastic rivets holding the three air ducts in place, and remove all three ducts. Also disconnect the outside air temperature sensor shown with the blue arrow.



214. At the bottom of the right hand side, forward corner of the fuse center, mount the provided intercooler relay and fuse mounting bracket with the provided nut using a 10 mm wrench. This view is from inside the right hand side fender looking up at the bottom of the fuse center.



215. Mount the intercooler harness relay to the rear stud of the mounting bracket with a provided nut and secure with a 10 mm wrench; route the trigger wire (yellow) covered in wire loom, down and back behind the fuse center.



216. Install the provided 15A fuse in the fuse center, and mount the fuse center tab to the stud remaining on the mounting bracket using the provided nut and secure with a 10 mm wrench.




217. Remove the cover of the fuse center. Remove the nut of the positive terminal at the forward, fender side of the fuse center with a 13 mm socket and install the eyelet terminal of the red wire from the fuse box of the intercooler pump relay.



218. Earlier you routed an EVAP breakout harness wire over to the right hand side of the engine. This is the "trigger" wire for the intercooler pump. Route this wire down along the main wire harness "Y", behind, up toward the fuse center. Secure this harness to the existing harness with the provided zip-ties as shown.



219. Connect the yellow wire from the relay of the intercooler pump harness to the "trigger" wire you routed up from the EVAP breakout harness earlier just behind the fuse center. Secure using a provided zip tie to the adjacent factory harness.



220. Remove the right hand side horn mounting bolt using a 10 mm wrench (the horn will stay in place with existing clips) and replace incorporating the provided intercooler pump bracket to the right hand side lower horn mounting bolt, add the provided bolt and nut at the hole in the forward flange of the mounting frame as shown. Torque the OEM mounting fastener and the provided nut/bolt to 108 in-lbs.



221. Route the remaining harness down and forward of the radiator overflow and connect the ground wire of the harness to the remaining stud on the intercooler pump mounting bracket just below the horn at the right hand side, forward of the wheel well. Secure in place with a provided nut and 10 mm wrench. Torque to 108 in-lbs. Verify your torque wrench settings.



222. Insert the intercooler pump into the rubber isolator and orient it as shown.



223. Slide the provided intercooler pump onto the pump mounting bracket installed earlier with the hose barbs pointing forward, and out toward the right hand side fender as shown. The metal tabs of the bracket should sit flush with the back side of the rubber isolator. Connect the intercooler pump harness terminal to the pump, ensure it snaps into position. It may take some force to get the connector to click into place.



224. Secure the provided intercooler reservoir mounting bracket to the right hand side upper fan shroud mount using the provided 16mm long bolt. Secure with 10 mm wrench.

Do not reuse the factory mounting fastener.



225. Mount the provided intercooler reservoir bottle to the just secured mounting bracket using the provided fasteners and secure with 10mm wrench.



Section 13: Low Temperature Radiator (LTR) Installation

226. Apply the provided sticky-back foam strips to the back-side of the Low Temperature Radiator (LTR) by pulling off the paper shields and pressing in place.



227. These are the intercooler connecting hose assemblies.



228. Attach the provided overflow hose to the overflow barb on the top of the LTR (shown with an arrow), securing in place with a provided spring clamp. Rotate the overflow barb so the hose runs in the direction shown. Also connect the upper LTR to Supercharger hose and orient it as shown with a provided spring clamp.



229. Slide the two hoses that are attached to the LTR through the opening on the right side of the condenser, and the main radiator.



230. Connect the fitting end of the hose just installed to the upper hose barb on the Charge Air Cooler (CAC) manifold. Ensure the connection snaps in place securely. It will help the fitting slide in place if you apply a small amount of Lubriplate lubricant (O-ring grease) to the CAC spigot first.




231. Connect the upper mounting bracket of the LTR to the cross frame with the provided bolts. Torque these two bolts to 18 ft-lbs.



232. Gather the following stabilizer brackets, rubber strips and self-tapping bolts. You will need to cut the rubber strips to fit in the brackets. First cut the smaller piece and stick it onto the bracket as shown in the center of the photo. Then cut and apply the larger piece of rubber so it looks like the completed bracket on the left.



233. Install the two stabilizer brackets at the bottom of the LTR, and secure with the self-tapping bolts in the two locations shown with arrows. Adjust the brackets so the rubber comes in contact with the bottom of the LTR. The two bolts should be snug.




234. From the front of the vehicle on the right hand side, slide the long end of the hose with no fittings (Reservoir to Intercooler Pump hose) down to the inside of the splash shield between the vertical frame and radiator into the engine compartment with the end containing the short 90° elbow hose section at the top.



235. Rotate the upper end of that 90° elbow section into the engine compartment as well, below the radiator reservoir overflow tank hose and secure to the intercooler reservoir lower hose barb using a provided worm gear clamp. It's important to utilize only worm gear clamps on the reservoir plastic hose barbs.




236. Connect the 90° elbow of the hose from the reservoir to the inlet hose barb on the intercooler pump and secure in position with a provided spring clamp.




237. Connect the free end of the LTR overflow hose to the metal barb on the reservoir bottle using a provided spring clamp. You may need to trim the hose to route as shown, secure in place with a zip tie where indicated.




238. Connect the end of the "Reservoir to Supercharger" hose without the fitting to the upper (inside) hose barb on the reservoir using a provided worm gear clamp. Again, it's important to utilize only worm gear clamps on the reservoir plastic hose barbs. Connect the fitting to the lower hose barb on the CAC manifold, again ensure the hose clamp snaps into position securely.




239. Trim a rectangular section of the right radiator duct that was removed earlier using the following dimensions.




240. Trim the yellow highlighted area away from the right radiator duct as well using these dimensions.



241. On the left radiator duct you will need to trim the yellow highlighted section away to make room for the LTR. Follow the dimensions shown.



242. Drill a 1.5" diameter hole in the lower radiator duct near the temperature sensor mount following the dimensions shown. Deburr the hole and place the provided grommet in this location.




243. Remove the small highlighted area near the temperature sensor mount. This cut is approximately .75" x .75".




244. Rotate the lower duct with the 1.5" hole into the position shown to allow the hose barb to be inserted through the hole.



245. The hose barb is now inserted through the hole. Next re-connect the outside air temperature sensor to the right hand side air deflector.



246. Connect the short end of the provided 6.5" by 2.5" length 90 degree hose to the intercooler pump discharge hose barb using a provided spring clamp. Route the long end of the hose to the lower LTR hose barb and secure with a provided spring clamp.




247. Re-install the left and right radiator ducts, and secure with the plastic rivets.



248. Mount the front bumper impact bar with the 6 OEM bolts using a 12 mm socket. Torque these bolts to 22 ft-lbs.



249. Use provided zip-ties to secure your hoses to adjacent components, making sure that hoses cannot migrate into moving components. Two locations are shown with arrows.



DO NOT OVERTIGHTEN zip ties, they are to secure movement NOT COMPRESS.


250. Reconnect the battery negative terminal in the trunk and replace the associated covers reversing the removal steps.



Make sure that you have followed step #1 in this manual to load the proper supercharger calibration to your vehicle's ECM.




251. Ensure the petcock is closed prior to refilling the engine coolant. Place rags around the filler opening. Filter factory coolant that was drained in an earlier step and pour into the reservoir tank if it is re-usable. Otherwise pour the new coolant according to the manufacturer's specifications. Squeeze the radiator hoses to help relieve air in system. Install the cap once the coolant reservoir has been filled. You may need to top it off after the engine has run for the first time.



252. Fill your intercooler system with the GM recommended coolant mixture. To check for leaks prior to re-installing fascia/grille, temporarily reconnect the battery and key the car to "Accessory" position.

DO NOT START. * NOTE: The pump will slowly spool up once it has power. It may take 5-10 seconds before you notice flow.



Section 14: Body Panel Installation, and Final Inspection

253. Reinstall the fascia/grille components reversing the removal process using the OEM fasteners.



254. Reinstall the wheel well liners using the factory fasteners.



255. Torque wheels after installation.

Refer to the owners manual for proper torque order and specifications under Vehicle Care, and Technical Data sections.




256. Reinstall the strut tower brace, if equipped, and torque to 18 ft-lbs.



257. Start your engine checking for leaks and listening for any unusual sounds or vibrations. There will be a slight whining as the rotors spin. This is a normal sound. Listen for any knocking or pinging (detonation). This vehicle requires 91 octane gasoline fuel and any residual lower octane fuel can create detonation. Run your engine for 5 minutes and shut down.



258. Check your intercooler, and radiator reservoir and top off as necessary.



259. Affix the routing diagram to the underside of the hood for reference.



260. Affix the octane requirement fuel sticker to the inside of the fuel door as reference.



261. Test drive vehicle for the first few miles under normal driving conditions. **Do not perform any wide open throttle runs.** Listen for any noises, vibrations, engine misfire or anything that does not seem normal. The supercharger does have a slight whining noise under boost conditions, which is normal. Check & bleed the charge air cooler reservoir as needed. After the initial test drive gradually work the vehicle to wide open throttle runs, listen for any engine detonation (pinging). If engine detonation is present let up on the throttle immediately. Most detonation causes are low octane gasoline still in the tank.




*** Use only premium gasoline fuel, 91 octane or better. ***


ATTENTION!
Your MAGNUSON SUPERCHARGER kit
is sensitive to corrosion!
Use only the vehicle manufacturer recommended coolant
for your engine in the intercooler system as well.

If you have questions about your vehicles performance, please check with your installation facility.

Appendix

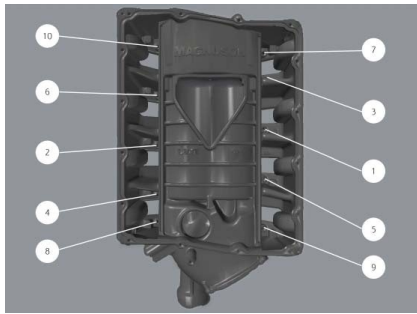

Supercharger Torque Sequence

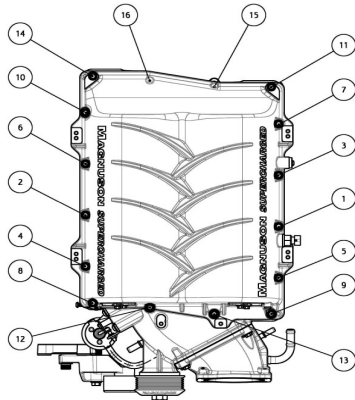

Lid Torque Sequence

Fastener Length


20mm: 9, 10, 11, 12, 13, 14 (9-14)

25mm: 15, 16

50mm: 1, 2, 3, 4, 5, 6, 7 (1-7)

60mm: 8

Appendix

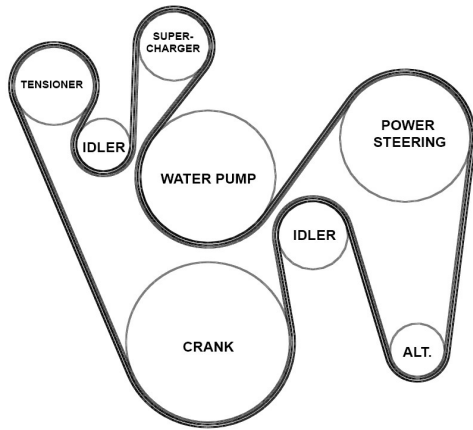

Belt Routing Diagram



Please enjoy your Magnuson Supercharged
performance responsibly.

MAGNUSON
SUPERCHARGERS