

HEATSHIELD ARMOR™

EXHAUST INSULATING HEAT SHIELD

APPLICATIONS:



RATED TO:

1800°

Up armor your exhaust heat shield insulation with Heatshield Armor™. It keeps more heat in the exhaust system which creates a scavenging effect, allowing exhaust gases to flow out of the system faster. It also prevents radiant heat from entering the driver's compartment and stops radiant heat damage to other vehicle components. Heatshield Armor™ will reduce radiant heat from your exhaust pipe by up to 60%. The outer armor of this exhaust heat shield allows it to be cleaned after installation, gives it a long lifespan, and also makes Heatshield Armor™ resistant to the elements. The inner ceramic liner makes it capable of withstanding 1800°F continuous, which allows this heat shield to be placed directly on headers, turbo manifolds, down pipes, DPF's, and exhaust pipes. It is flexible, easy to cut and install. We recommend the ½" thick Heatshield Armor™ for forced induction and racing applications.

INSULATION TYPE: DIRECT CONTACT

USES: EXHAUST PIPES, DOWN PIPES, HEADERS, TURBO MANIFOLDS, POWERSPORTS, MILITARY



*ALLOWS EXHAUST
GAS TO FLOW
FASTER*

*KEEPS HEAT OUT
OF THE DRIVER'S
COMPARTMENT*

*FLEXIBLE, EASY TO
CUT AND INSTALL*

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
170001	HEATSHIELD ARMOR™ ¼" THICK; 6" X 5'	175104	HEATSHIELD ARMOR™ ½" THICK; 1' X 4'
170002	HEATSHIELD ARMOR™ ¼" THICK; 6" X 10'	175105	HEATSHIELD ARMOR™ ½" THICK; 1' X 5'
170102	HEATSHIELD ARMOR™ ¼" THICK; 1' X 2'	175110	HEATSHIELD ARMOR™ ½" THICK; 18" X 4'
170103	HEATSHIELD ARMOR™ ¼" THICK; 1' X 3'	175111	HEATSHIELD ARMOR™ ½" THICK; 18" X 5'
170104	HEATSHIELD ARMOR™ ¼" THICK; 1' X 4'	175115	HEATSHIELD ARMOR™ ½" THICK; 18" X 10'
170105	HEATSHIELD ARMOR™ ¼" THICK; 1' X 5'	175202	HEATSHIELD ARMOR™ ½" THICK; 2' X 2'
170202	HEATSHIELD ARMOR™ ¼" THICK; 2' X 2'	175304	HEATSHIELD ARMOR™ ½" THICK; 3' X 4'
175102	HEATSHIELD ARMOR™ ½" THICK; 1' X 2'	175325	HEATSHIELD ARMOR™ ½" THICK; 3' X 25'
175103	HEATSHIELD ARMOR™ ½" THICK; 1' X 3'		

HEATSHIELD ARMOR WELD TAPE™

EXHAUST INSULATION SEAM TAPE

APPLICATIONS:




RATED TO:

1800°

Heatshield Armor Weld Tape™ is used to seam edges of Heatshield Armor™ together to complete installation. It can also be used to protect the ends of exposed insulation on Heatshield Armor, and to seal the ends of HP Sticky Shield™ to further protect these products and extend their lifetime.

INSULATION TYPE: DIRECT CONTACT **USES:** SEAMS FOR HEATSHIELD ARMOR™, PROTECT EXPOSED INSULATION EDGES FOR HEATSHIELD ARMOR™, SEAL EDGES OF HP STICKY SHIELD™, POWERSPORTS, MILITARY

PART NO.	DESCRIPTION
179001	HEATSHIELD ARMOR WELD TAPE™ 1" X 39"

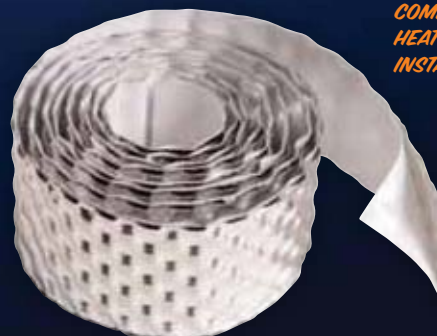

*COMPLETES THE
HEATSHIELD ARMOR
INSTALLATION*

*PROTECTS THE
ENDS OF EXPOSED
INSULATION*