


TOOLS REQUIRED: 5/16" DRILL * 1/2" HEX SOCKET * 1/2" WRENCH * 5/16" NUT DRIVER * 3/8" NUT DRIVER


①

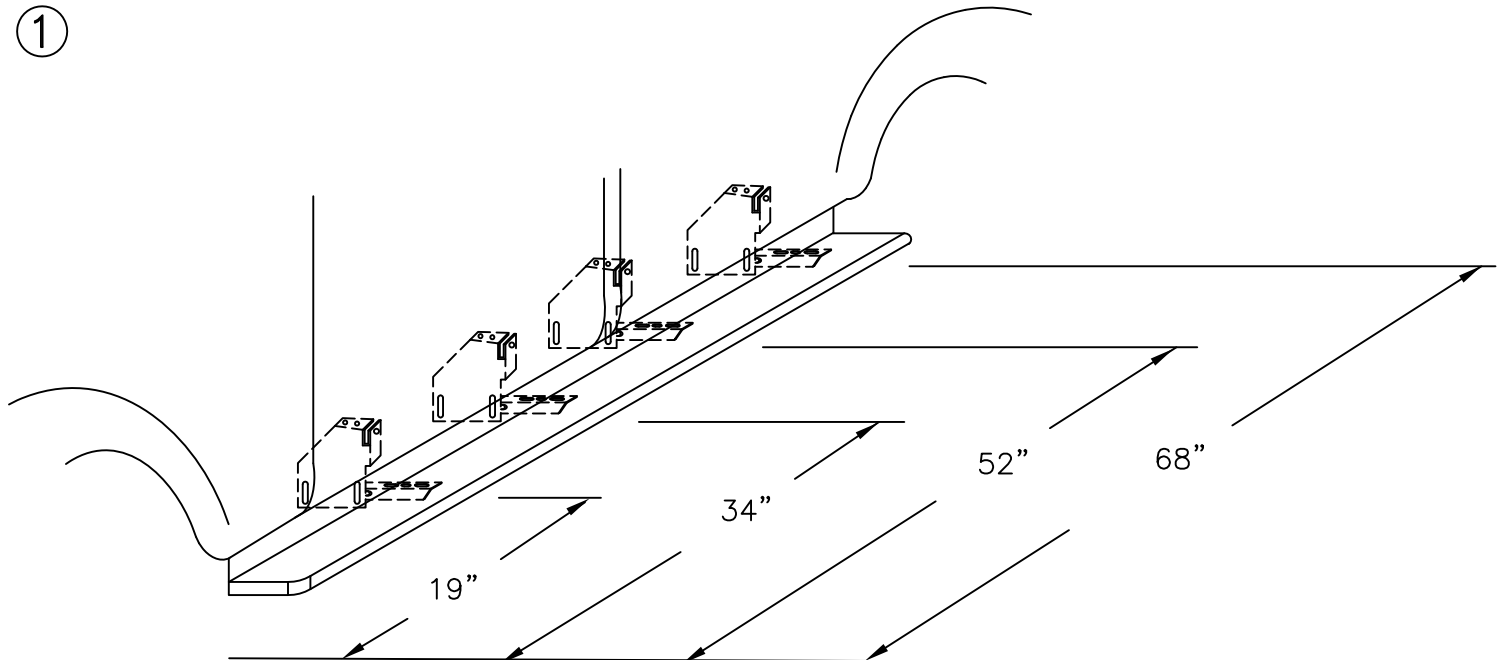

(DRIVERS SIDE SHOWN)
MEASURE FROM FRONT WHEEL WELL TO DIMENSIONS SHOWN


②

BRACKET ASSEMBLY
ASSEMBLE WITH 5/16" BOLTS

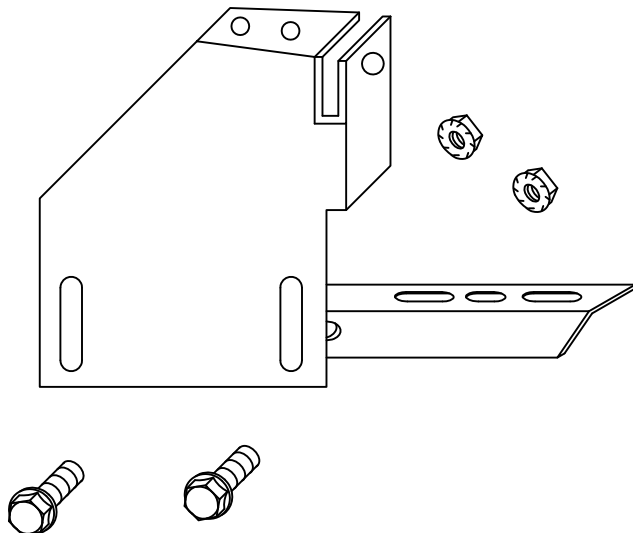

③


DRILL 5/16" HOLES IN PINCH WELD AT MEASURED LOCATIONS
ATTACH WITH 5/16" BOLT & NUT IN PINCH WELD
USE 3/4" LONG SELF DRILLING SCREW TO UNDER BODY

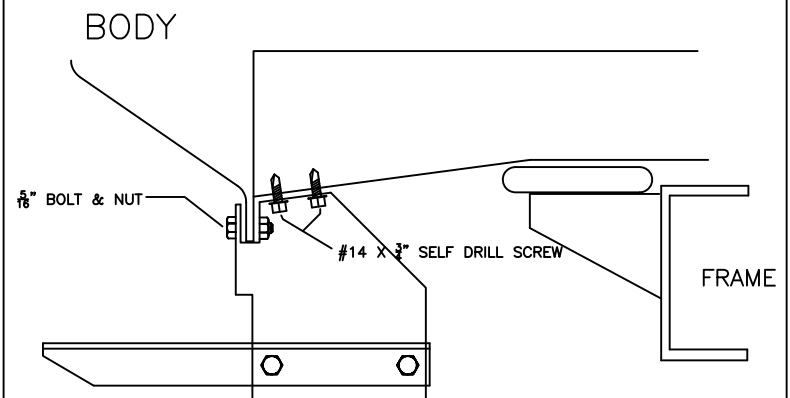

MOUNT AT LOCATION SHOWN AT ①

④

APPLY FOAM TAPE AND STEP TREAD TO BOARD. ATTACH THE BOARD TO THE BRACKETS WITH SELF DRILLING SCREWS.

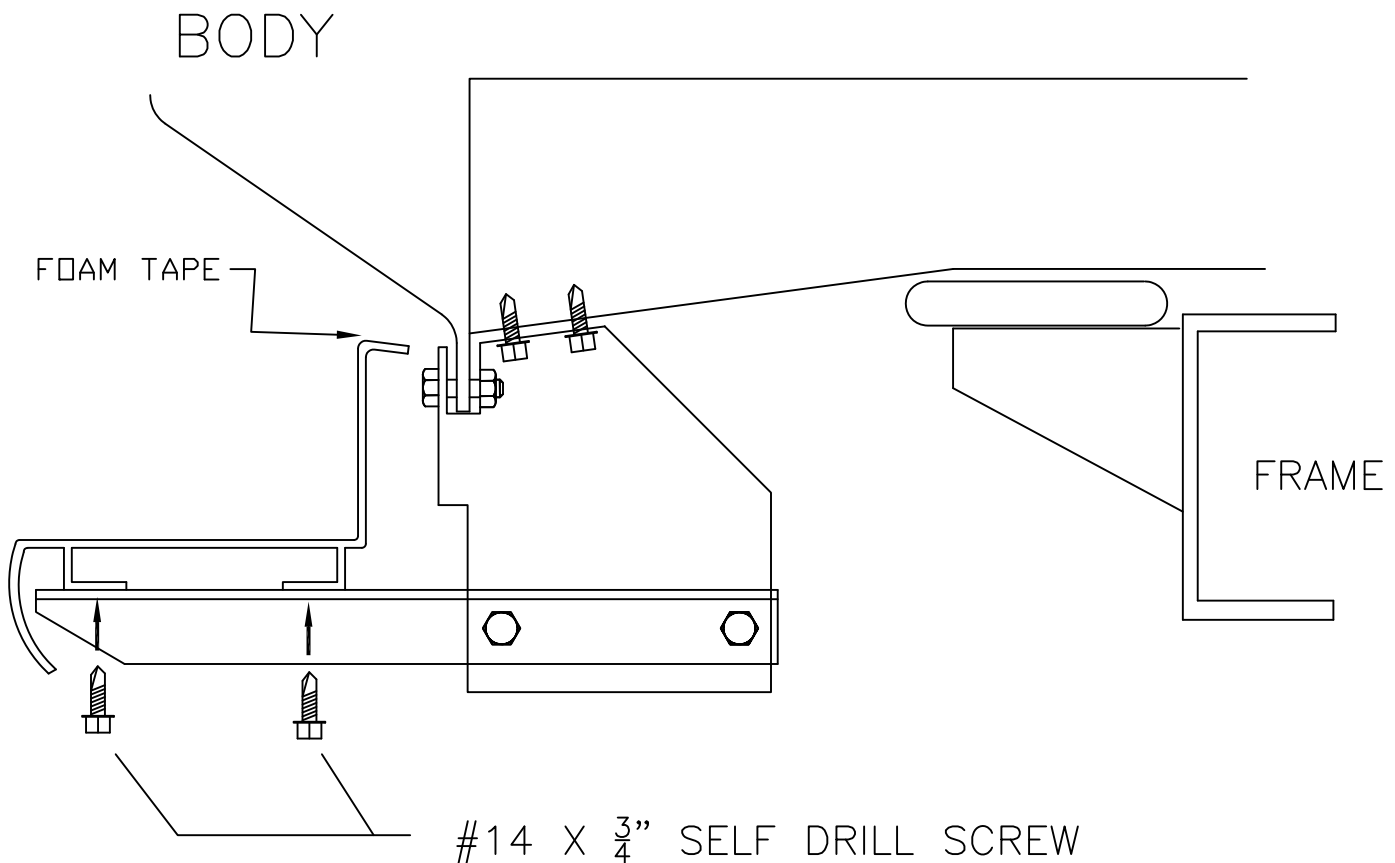

⑤

WITH BOARD LEVEL TIGHTEN
ANY LOOSE BOLTS

REPEAT FOR OTHER SIDE